



BI-LITE

APPLICATIONS

Wall units, table lamps, pendant lamps, recessed or surface-mounted downlighters

FEATURES

Advanced cold spot control technology results in high luminous efficiency // Nickel coated copper technology used for lamps bases, this eliminates faulty electrical contact and makes lamp safer // PBT flame-resistance material can withstand high temperature making lamp fire resistance // Tri-band phosphor powder results in high luminous efficiency and emphasize natural color

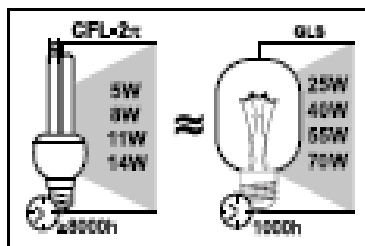

| BASE LAMP | POWER | INPUT VOLTAGE | FREQ. | LUMINOUS FLUXES | LUMINOUS EFFICACY | COLOR TEMP. | CRI | AVERAGE LIFETIME | TUBE | | LENGTH (L) | DIAMETER (D) |
|-----------|-------|---------------|----------|-----------------|-------------------|-------------|------|------------------|----------------|-------|------------|--------------|
| | | | | | | | | | DIAMETER (C) | SHAPE | | |
| E14 | 5 W | 220-240 V | 50-60 Hz | 280 lm | 56 lm/W | 2700 K | ≥ 80 | ≥ 8000 h | 9 ± 1 mm (T3) | 2 U | 108 ± 2 mm | 36 ± 1 mm |
| E14 | 8 W | 220-240 V | 50-60 Hz | 270 lm | 54 lm/W | 6500 K | ≥ 80 | ≥ 8000 h | 9 ± 1 mm (T3) | 2 U | 108 ± 2 mm | 36 ± 1 mm |
| E27 | 5 W | 220-240 V | 50-60 Hz | 280 lm | 56 lm/W | 2700 K | ≥ 80 | ≥ 8000 h | 9 ± 1 mm (T3) | 2 U | 99 ± 2 mm | 36 ± 1 mm |
| E27 | 8 W | 220-240 V | 50-60 Hz | 270 lm | 54 lm/W | 6500 K | ≥ 80 | ≥ 8000 h | 9 ± 1 mm (T3) | 2 U | 99 ± 2 mm | 36 ± 1 mm |
| E27 | 8 W | 220-240 V | 50-60 Hz | 480 lm | 60 lm/W | 2700 K | ≥ 80 | ≥ 8000 h | 12 ± 1 mm (T4) | 2 U | 128 ± 2 mm | 42 ± 1 mm |
| E27 | 8 W | 220-240 V | 50-60 Hz | 465 lm | 58 lm/W | 6500 K | ≥ 80 | ≥ 8000 h | 12 ± 1 mm (T4) | 2 U | 128 ± 2 mm | 42 ± 1 mm |
| E27 | 11 W | 220-240 V | 50-60 Hz | 660 lm | 60 lm/W | 2700 K | ≥ 80 | ≥ 8000 h | 12 ± 1 mm (T4) | 2 U | 143 ± 2 mm | 42 ± 1 mm |
| E27 | 11 W | 220-240 V | 50-60 Hz | 640 lm | 58 lm/W | 6500 K | ≥ 80 | ≥ 8000 h | 12 ± 1 mm (T4) | 2 U | 143 ± 2 mm | 42 ± 1 mm |
| E27 | 14 W | 220-240 V | 50-60 Hz | 870 lm | 62 lm/W | 2700 K | ≥ 80 | ≥ 8000 h | 12 ± 1 mm (T4) | 2 U | 160 ± 2 mm | 42 ± 1 mm |
| E27 | 14 W | 220-240 V | 50-60 Hz | 840 lm | 60 lm/W | 6500 K | ≥ 80 | ≥ 8000 h | 12 ± 1 mm (T4) | 2 U | 160 ± 2 mm | 42 ± 1 mm |