



TL-E LIFEMAX Standard Colours

TL-E 22W/54-765 1CT/20

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.


Product data

| General Information | |
|------------------------------------|---------------|
| Cap-Base | G10Q [G10q] |
| Life to 50% Failures (Nom) | 13000 h |
| Light Technical | |
| Color Code | 54-765 |
| Luminous Flux (Nom) | 1050 lm |
| Color Designation | Cool Daylight |
| Lumen Maintenance 10000 h (Nom) | 73 % |
| Lumen Maintenance 2000 h (Nom) | 80 % |
| Lumen Maintenance 5000 h (Nom) | 71 % |
| Correlated Color Temperature (Nom) | 6200 K |
| Luminous Efficacy (Rated) (Nom) | 48 lm/W |
| Color Rendering Index (Nom) | 72 |
| Operating and Electrical | |
| Power (Rated) (Nom) | 22.0 W |
| Lamp Current (Nom) | 0.400 A |
| Voltage (Nom) | 62 V |

| Controls and Dimming | |
|---------------------------------|----------------------------|
| Dimmable | Yes |
| Approval and Application | |
| Energy Efficiency Label (EEL) | B |
| Mercury (Hg) Content (Nom) | 9 mg |
| Product Data | |
| Full product code | 871150063390300 |
| Order product name | TL-E 22W/54-765 1CT/20 |
| EAN/UPC - Product | 8711500633903 |
| Order code | 928026205436 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 20 |
| Material Nr. (12NC) | 928026205436 |
| Net Weight (Piece) | 0.110 kg |
| ILCOS Code | FSC-22/62/2A-E-G10q-29/210 |

TL-E LIFEMAX Standard Colours


Dimensional drawing

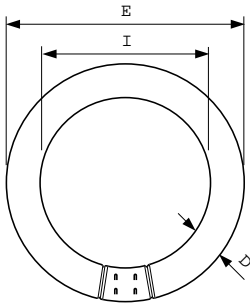


| Product | D (max) | D (min) | E (min) | E (max) | I (min) | I (max) |
|-----------------|---------|---------|----------|----------|----------|----------|
| TL-E 22W/54-765 | 30.9 mm | 26.2 mm | 205.0 mm | 213.5 mm | 149.1 mm | 155.6 mm |
| 1CT/20 | | | | | | |

TL-E 22W/54-765

Photometric data

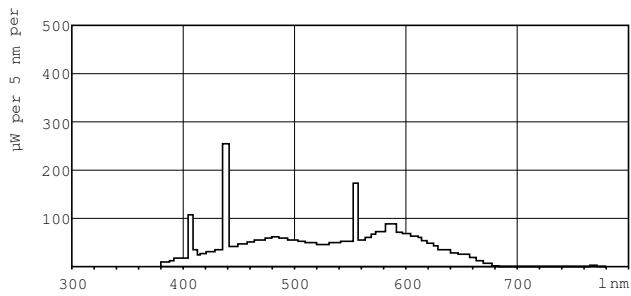

Lightcolor /54-765

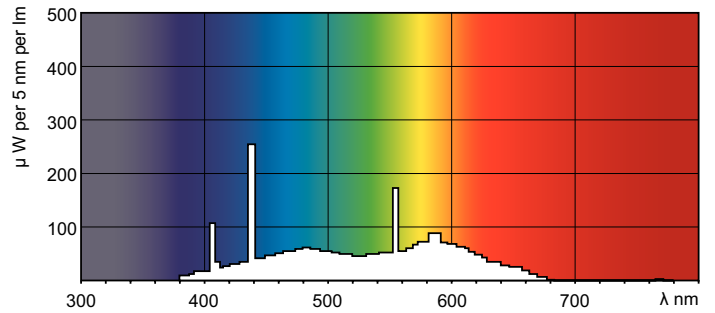

Lightcolor /54-765

