



TL-E Circular Standard Colours

TL-E 32W/54-765 1CT/12

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.

Product data

General Information	
Cap-Base	G10Q [G10q]
Life to 50% Failures (Nom)	13000 h
Light Technical	
Color Code	54-765
Luminous Flux (Nom)	1750 lm
Color Designation	Cool Daylight
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	83 %
Lumen Maintenance 5000 h (Nom)	74 %
Correlated Color Temperature (Nom)	6200 K
Luminous Efficacy (Rated) (Nom)	57 lm/W
Color Rendering Index (Nom)	72
Operating and Electrical	
Power (Rated) (Nom)	32.0 W
Lamp Current (Nom)	0.450 A
Voltage (Nom)	81 V


Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	9 mg
Product Data	
Full product code	871150063387315
Order product name	TL-E 32W/54-765 1CT/12
EAN/UPC - Product	8711500633873
Order code	928026305460
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928026305460
Net Weight (Piece)	95.000 g
ILCOS Code	FSC-32/62/2A-E-G10q-29/299

TL-E Circular Standard Colours

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

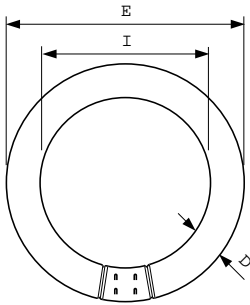


Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 32W/54-765	30.9 mm	27.1 mm	299.0 mm	303.5 mm	241.0 mm	246.0 mm
1CT/12						

TL-E 32W/54-765

Photometric data

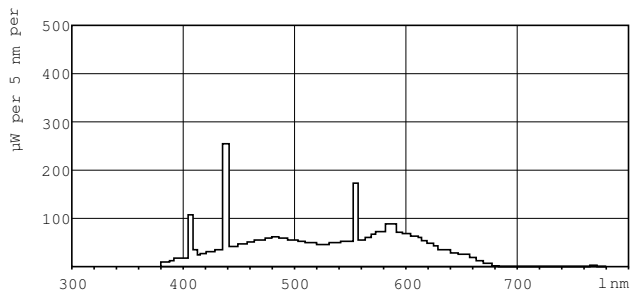

Lightcolor /54-765

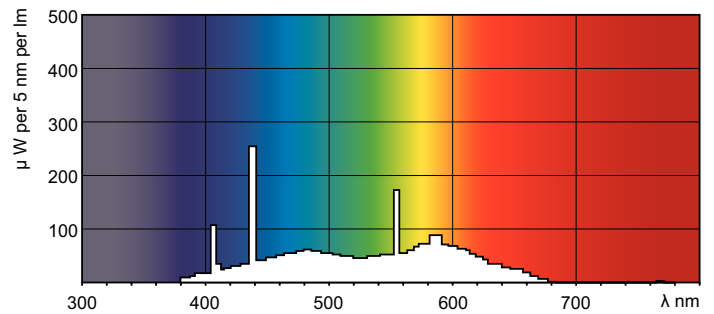

Lightcolor /54-765

